

DS-KH2220-S Four-Wire Analog Indoor Station



- Hands-free video intercom communication
- Supports three indoor stations simultaneously in the intercom system
- Supports monitoring the door station and the external analog camera
- Supports captured image playback
- Remote unlocking




Specification


| Audio parameters | |
|------------------------|--|
| Audio Input | Built-in Omnidirectional Microphone |
| Audio Output | Built-in Loudspeaker |
| Audio Quality | Noise Suppression and Echo Cancellation |
| General | |
| Power Supply | 12 VDC |
| Power Consumption | ≤ 5 W |
| Working temperature | -10° C to + 55° C (14° F to 131° F) |
| Working humidity | 10% to 90% |
| Dimensions (L x W x H) | 195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" ×0.7") |
| Door station | |
| Power supply | 12 VDC |

Available Model

DS-KH2220-S

Dimension

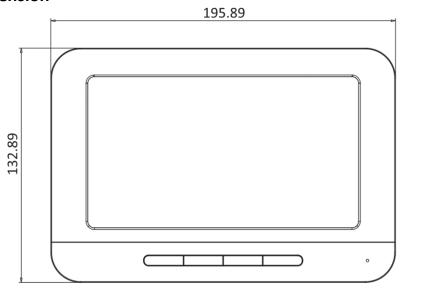



Unit:mm



Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision_Global





